


Satellite Cantilever Crescent



Tools required

- Pozi head screw driver
- Allen key (4mm)

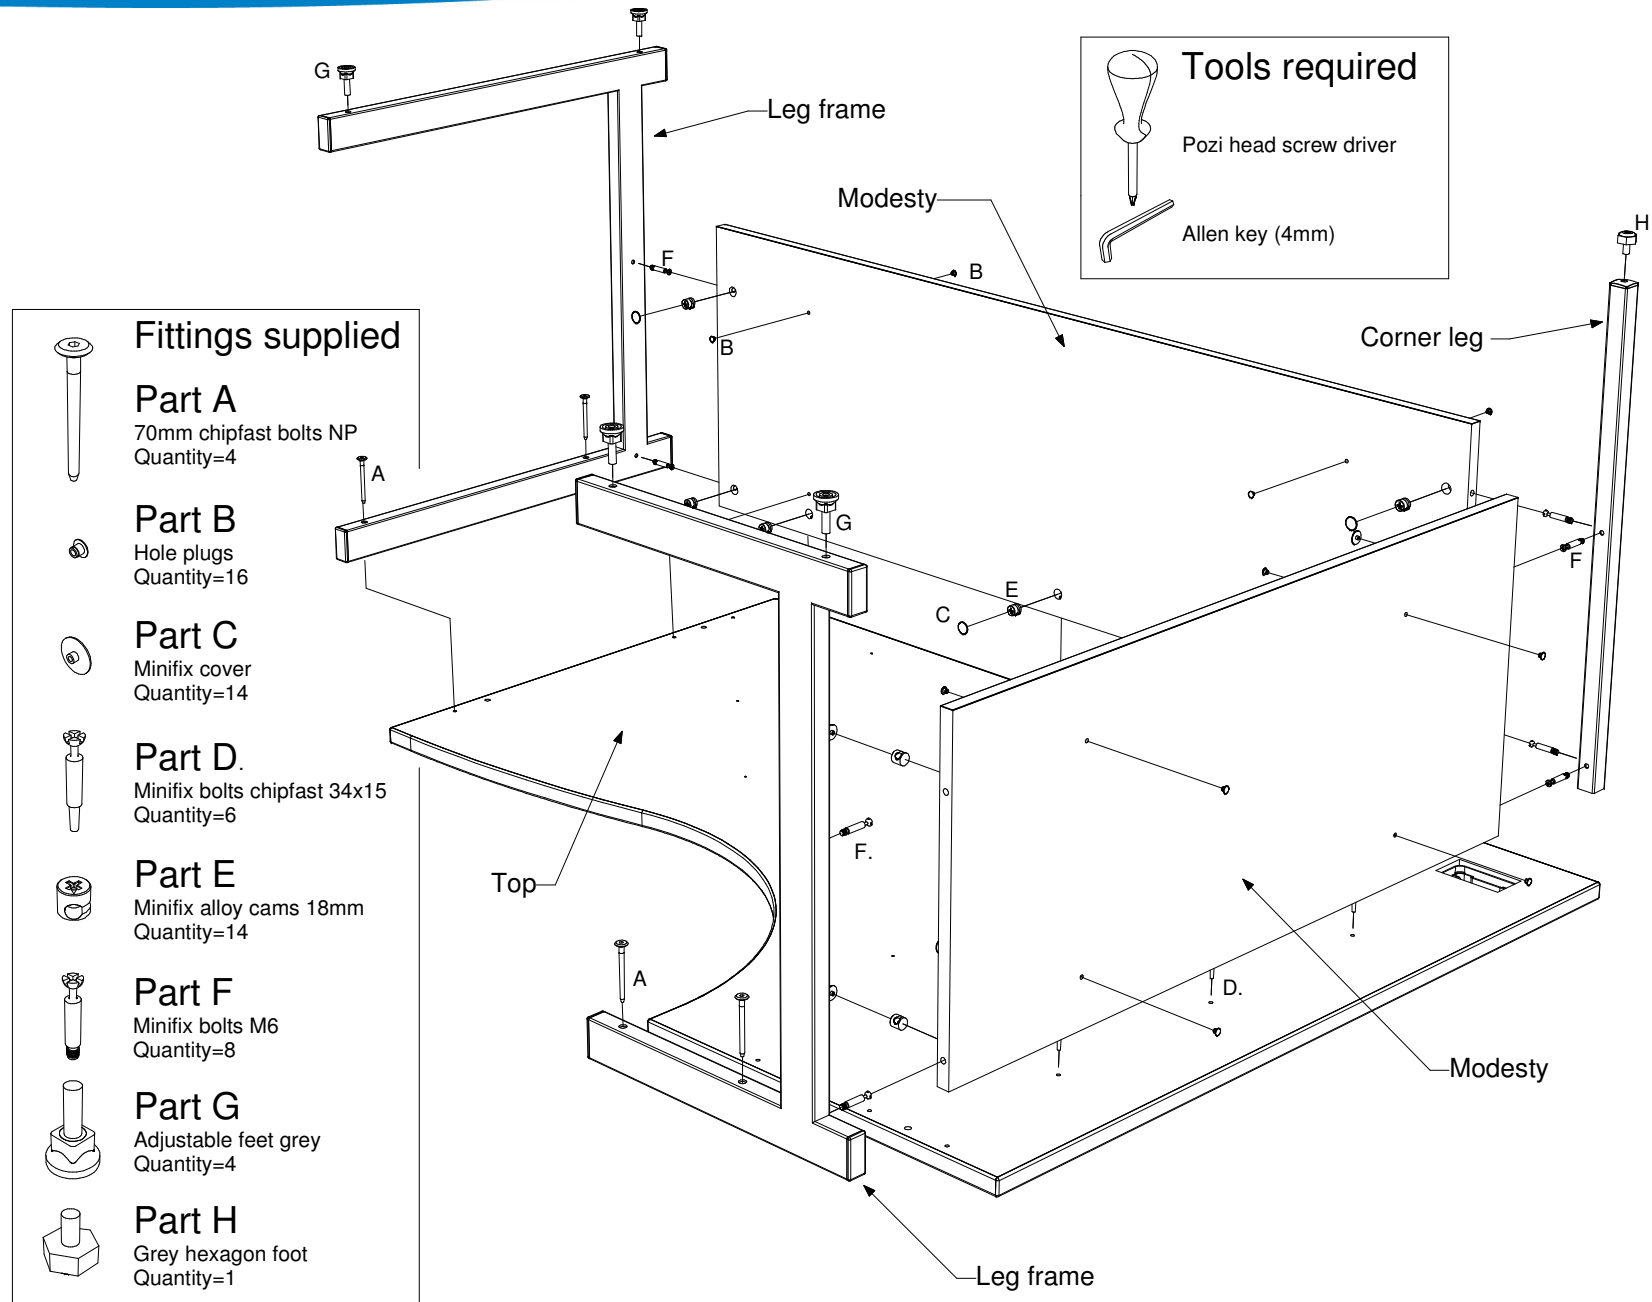








Fittings supplied



- Part A**
70mm chipfast bolts NP
Quantity=4
- Part B**
Hole plugs
Quantity=16
- Part C**
Minifix cover
Quantity=14
- Part D**
Minifix bolts chipfast 34x15
Quantity=6
- Part E**
Minifix alloy cams 18mm
Quantity=14
- Part F**
Minifix bolts M6
Quantity=8
- Part G**
Adjustable feet grey
Quantity=4
- Part H**
Grey hexagon foot
Quantity=1

- Assembly steps**
1. Unscrew the modesty's from the top and discard the screws.
 2. Place the top upside down. Screw six of part D to the top (for modesty attachment).
 3. Push seven of part E (with the arrows facing out) into each of the modesty's. (First ensuring the holes are free from any debris)
 4. Screw part F (x4) into the corner leg, connect to one modesty and tighten part E (x2)
 5. Add the modesty (with corner leg) to the top, do not tighten part E (x3).
 6. Lift the attached modesty and corner leg slightly, connect the other modesty via parts F on the corner leg, then lower all onto the fittings on the top. Tighten part E (x8)
 7. Screw part F (x4) into the uprights on the two leg frames.
 8. Fix the leg frames to the desk, locating parts F in the holes on the modesty. Then tighten part E (x4) on the modesty's
 9. Screw part A (x4) through the leg frames into the top.
 10. Screw part G (x4) into the leg frames and part H into the corner leg.
 11. Push parts B and C into the appropriate places to finish the desk.

Satellite Slab Crescent

Fittings supplied

-  **Part A**
Dowels
Quantity=4
-  **Part B**
Hole plugs
Quantity=20
-  **Part C**
Minifix cover
Quantity=18
-  **Part D**
Minifix bolts chipfast 34x15
Quantity=14
-  **Part E**
Minifix alloy cams 18mm
Quantity=14
-  **Part F**
Minifix bolts M6
Quantity=4
-  **Part G**
Adjustable feet grey
Quantity=4
-  **Part H**
Grey hexagon foot
Quantity=1
-  **Part I**
Minifix alloy cams 25mm
Quantity=4

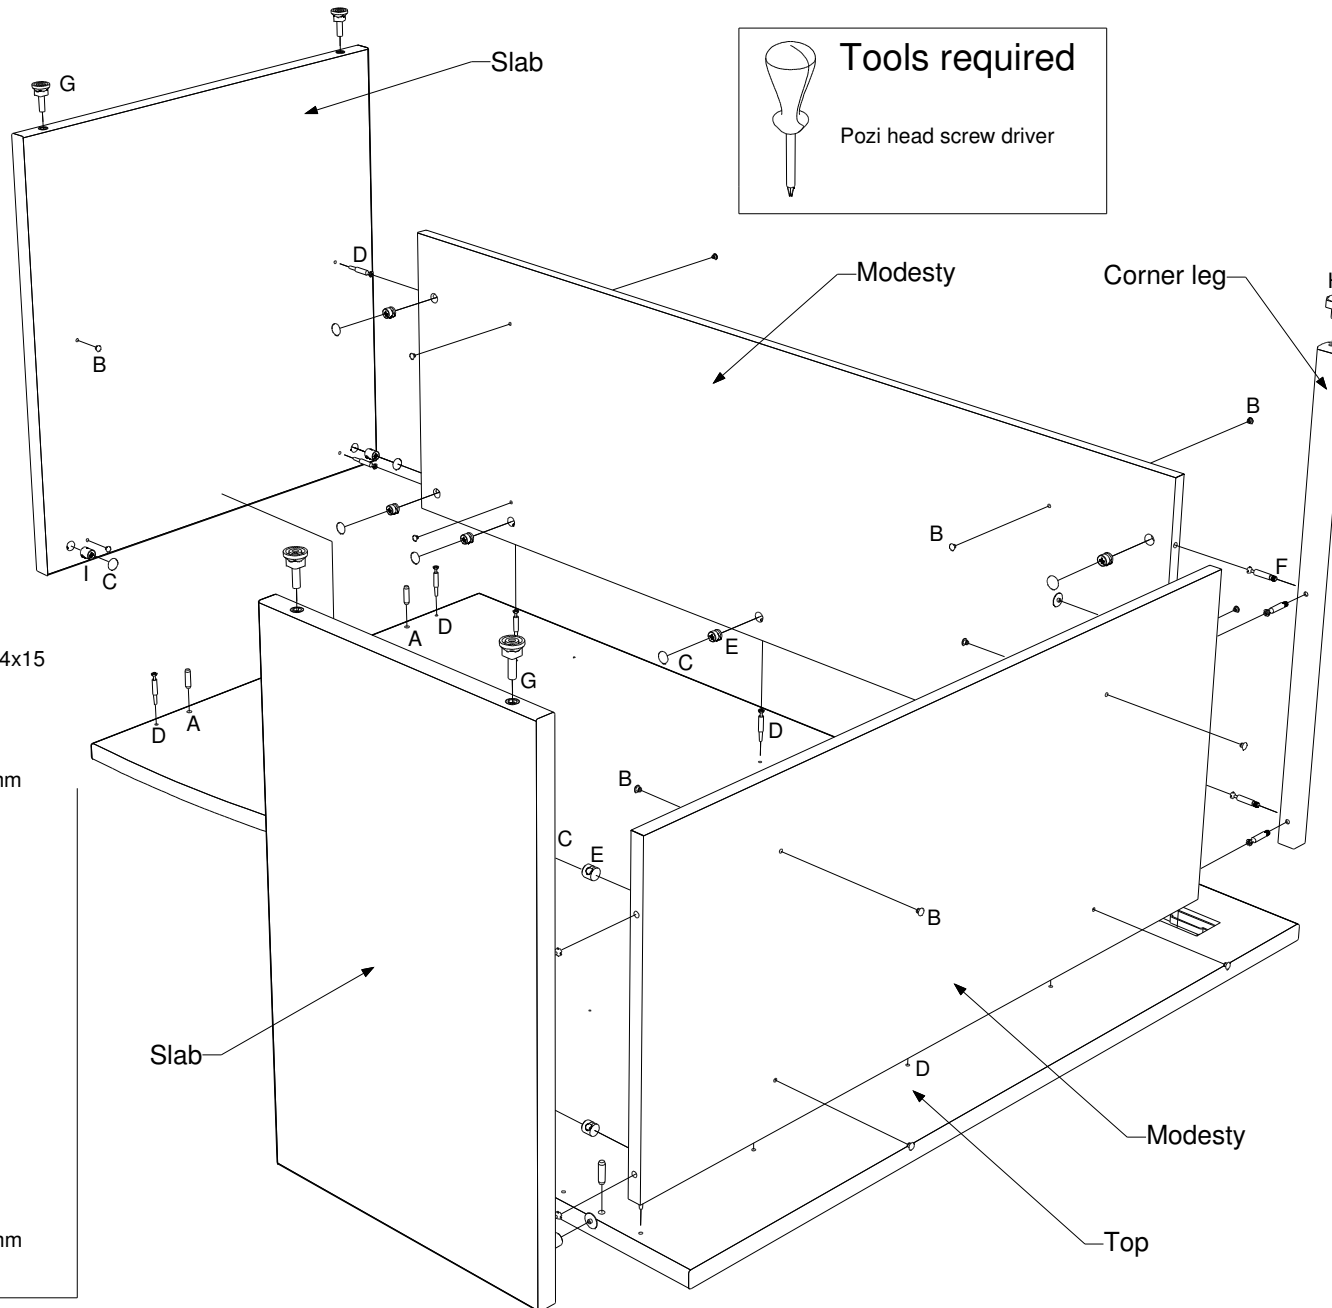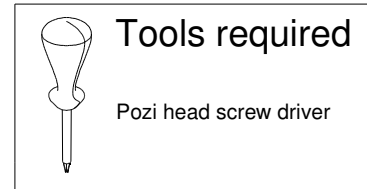

Assembly steps

1. Unscrew the modesty's from the top and discard the screws.
2. Separate the two slabs and discard the small packing dowels.
3. Place top upside down. Screw ten of part D and push four of part A into the appropriate holes on the top.
4. Push seven of part E (with the arrows facing out) into each of the modesty's. (First ensuring the holes are free from any debris).
5. Screw part F (x4) into the corner leg, connect to one modesty and tighten part E (x2).
6. Add the modesty (with corner leg) to the top, do not tighten part E (x3).
7. Lift the attached modesty and corner leg slightly, connect the other modesty via parts F on the corner leg, then lower all onto the fittings on the top. Only tighten parts E (x2) that connect to the corner leg.
8. Screw part D (x4) and push part I (x4) into the appropriate holes on the slabs. (Panels are ambidextrous, be sure to add fittings correctly).
9. To add a slab to the desk lift the modesty slightly, locate parts D on the slab into the holes on the modesty, then lower both the slab and the modesty onto the fittings on the top. Repeat with other slab. Tighten part I (x4) on the slabs and part E (x10) on the modesty's.
10. Screw part G (x4) into the slabs and part H into the corner leg.
11. Push parts B and C into the appropriate places to finish the desk.