










Crescent Reception Unit


Part 1 of 2

Fittings supplied

-  **Part A**
Dowels
Quantity=45
-  **Part B**
Minifix bolts chipfast 34x15
Quantity=42
-  **Part C**
Minifix bolts chipfast 34x11
Quantity=5
-  **Part D**
Minifix alloy cams 25mm
Quantity=12
-  **Part E**
Minifix alloy cams 18mm
Quantity=35
-  **Part F**
Cover caps
Quantity=47
-  **Part G**
Adjustable feet
Quantity=9
-  **Part H**
Hole plugs 5mm
Quantity=6
-  **Part I**
Hole plugs 8mm
Quantity=6

Important

Only screw part C (x3) into the holes marked with the green stickers.

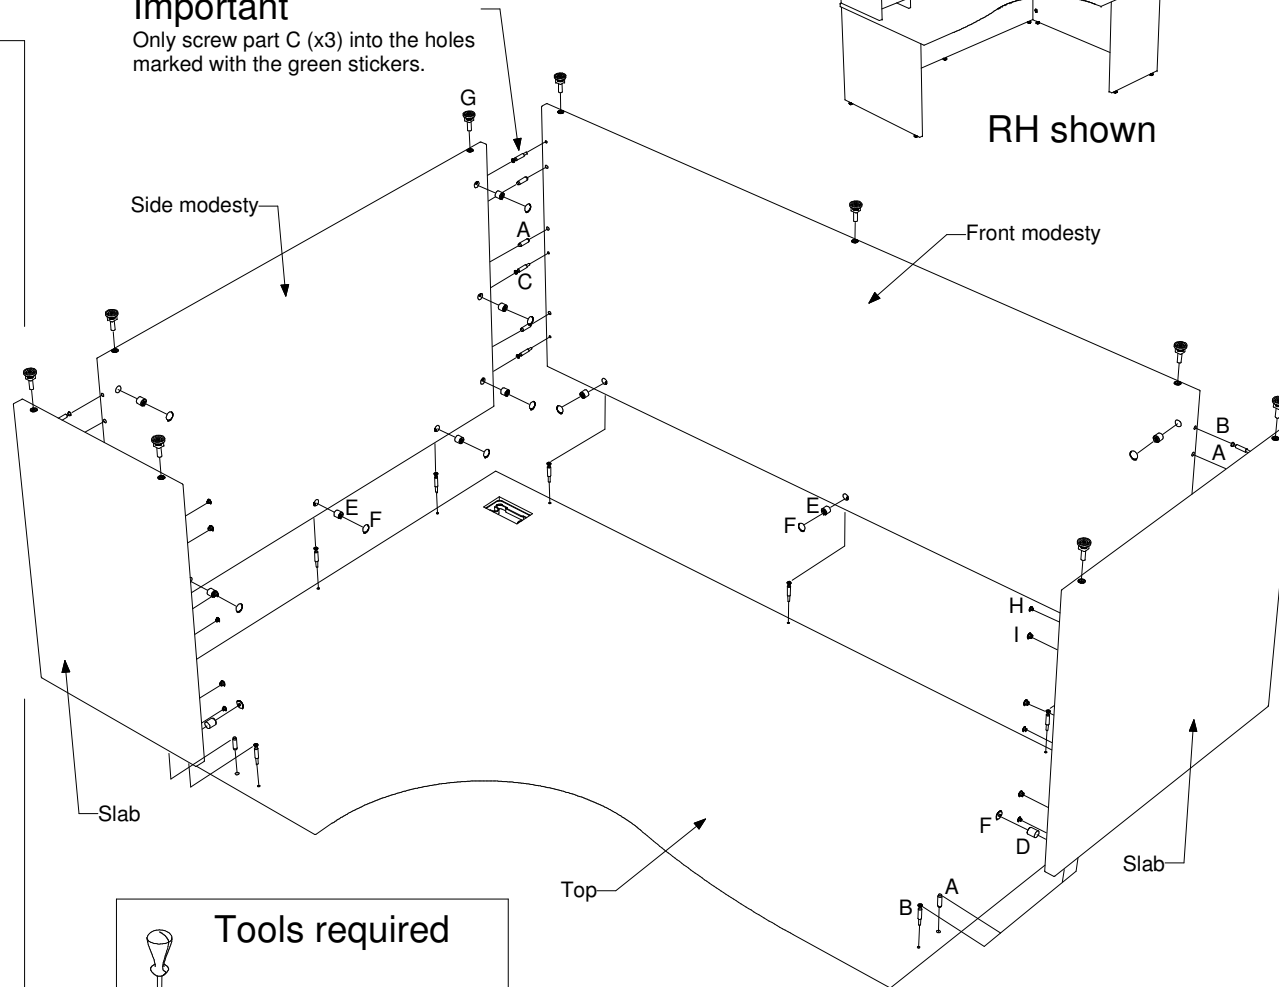

Tools required

-  Pozi head screw driver
-  Nylon hammer

Important

Please ensure parts B and C are screwed into the correct holes, failure to do this will damage your product.


Assembly steps

1. Place top upside down. Screw part B (x10) and push part A (x4) in the appropriate holes on the top.
2. Push part E (x9) (with the arrows facing out) into the side modesty. (First ensuring the holes are free from any debris). Then in the same manner push part E (x6) into the front modesty.
3. Screw part C (x3) into the holes marked with the green stickers on the front modesty. (**Do not** use part B as this will damage your product). Then push part A (x3) in the remaining holes on the same face.
4. Add the front modesty to the top, do not tighten part E (x3).
5. Lift the front modesty slightly, connect the side modesty via parts A and C on the front modesty, then lower all onto the fittings on the top. Only tighten parts E (x3) that connect the two modesty panels.
6. Screw part B (x6), push part A (x6) and D (x4) (arrows facing out / holes free from debris) into the appropriate holes on the two slabs. (Panels are ambidextrous, be sure to add fittings correctly, some holes will be free).
7. To add a slab to the desk lift the modesty slightly, locate parts A and B on the slab into the holes on the modesty, then lower both the slab and the modesty onto the fittings on the top. Repeat with other slab.
8. Tighten all of parts E and D on the slabs and modesty panels.
9. Screw part G (x9) into the slabs and modesty panels.
10. Push part F (x19), part H (x6) and part I (x6) into the appropriate places to finish the desk.
11. Turn desk over onto feet.



Crescent Reception Unit

Part 2 of 2

Step 1

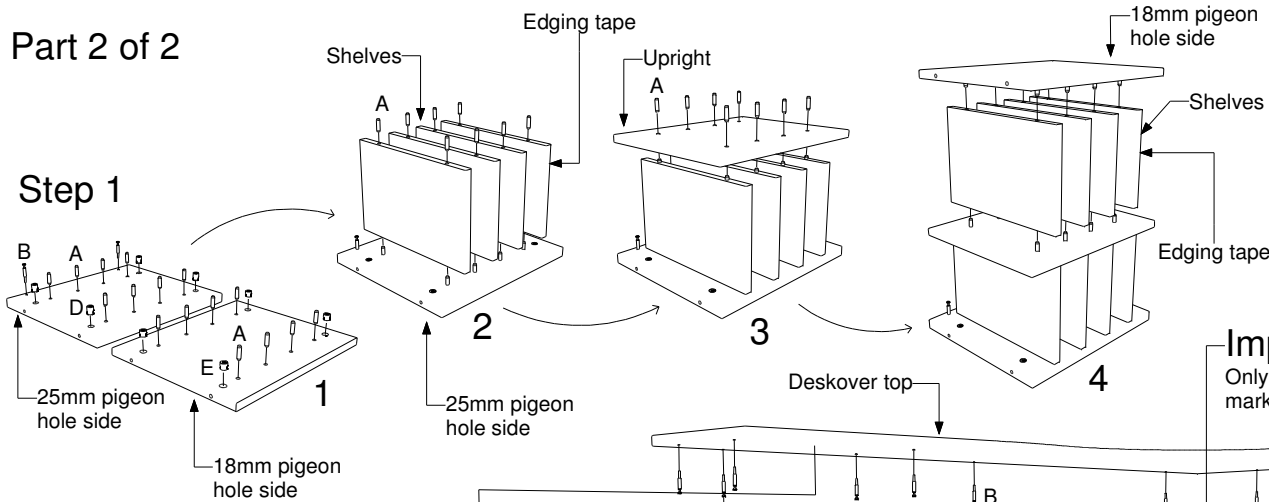

Tools required

-  Pozi head screw driver
-  Nylon hammer

Assembly steps


Step 1

1. Lay the two pigeon hole sides down with the holes facing up. On the 25mm panel screw part B (x2), push part D (x4) (arrows facing out / holes free from debris) and part A (x8) into the appropriate holes. In the same manner add part A (x8) and part E (x4) to the 18mm pigeon hole side.
2. Take the 25mm pigeon hole side, to this add 4 shelves ensuring the edging tape is on the front. Then push part A (x8) into the appropriate holes on the shelves.
3. Push the upright onto the shelves ensuring the edging tape is on the front then push part A (x8) into the appropriate holes on the upright.
4. Add 4 more shelves, and the 18mm pigeon hole side to complete the assembly, (ensure the edging tape is on the front).

Important

Only screw part C (x2) into the holes marked with the green stickers

Step 2

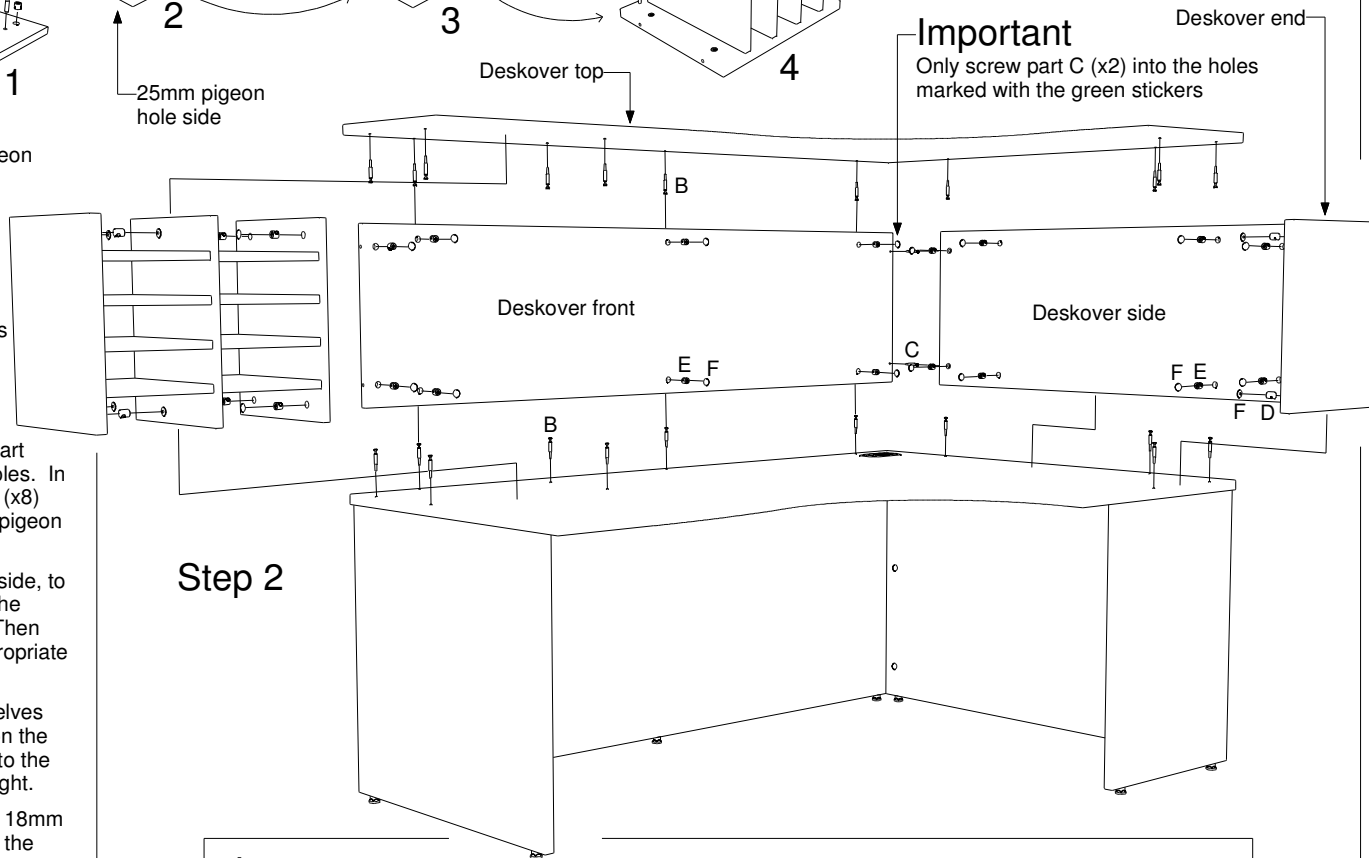

Important

Please ensure parts B and C are screwed into the correct holes, failure to do this will damage you product.

Assembly steps

Step 2

5. Screw part B (x11) into the desk top.
 6. To the desk over side add part E (x8) (arrows facing out / holes free from debris). Then in the same manner add part E (x8) to the desk over front and screw part C (x2) into the holes marked with the green stickers. (**Do not** use part B as this will damage your product)
 7. Add the desk over front to the top (do not tighten parts E).
 8. Lift the deskover front slightly, Connect the desk over side via parts C on the deskover front. Then lower both panels onto the fittings on the top, only tighten parts E (x2) that connect the two deskover panels.
 9. Screw part B (x2) and push part D (x4) into the holes on the desk over end (arrows facing out / holes free from debris). To add the end panel lift the side panel slightly and locate parts B (x2) into the holes on the side panel. Then lower both the end and side panels onto the fittings on the top.
 10. To add the pigeon hole, (ensuring the assembly remains complete) slide it horizontally so parts B on the 25mm pigeon hole side locate in the holes on the deskover front (do this without lifting the deskover front), stop when the pigeon hole hits the bolts (part B) on the desk top.
- Then lift the pigeon hole and deskover front slightly and slide the pigeon hole the remaining distance. Then lower all onto the fittings on the desk top.
11. Add parts B (x11) to the desk over top, lower this onto the unit to complete the assembly.
 12. Tighten all of parts E and D, and push parts F (x28) into the appropriate places to finish the desk.