














## Fittings supplied






-  **Part A - A/0559**  
Cupboard lock striker plate  
Quantity=1
-  **Part B - A/0648**  
Cupboard door lock  
Quantity=1
-  **Part C - D/0362**  
Lock rosette  
Quantity=1
-  **Part D - A/0552**  
Cupboard door bolt  
Quantity=2
-  **Part E - F/0442**  
5/8"x4g c/snk BZP  
Quantity=1
-  **Part F - F/0470**  
3/4" x 6g c/snk pozi BZP  
Quantity=8
-  **Part G - A/0622**  
40mm angled striker plate  
Quantity=2
-  **Part H - A/0755**  
Door buffer 12 x 3 clear  
Quantity=2
-  **Part I - A/0771**  
Door buffer 8 x 1.6 clear  
Quantity=2
-  **Part J - A/0620**  
Bow handle brushed nickel  
Quantity=2
-  **Part K - F/0468**  
M4 x 23mm handle screw  
Quantity=4


## Part 1 of 2 - Preparing the doors

### BCA1 800 wide doors shown

### Tools required

-  Pozi head screw driver
-  Nylon hammer

-  **Part L - F/0461**  
Nylon insert  
Quantity=4
-  **Part M - F/0412**  
5/8"x6g C/Snk Pozi BZP  
BCA1 / BCA2 Quantity=12  
BCA3 / BCA4 Quantity=16
-  **Part N - A/0592**  
Hinge 100 opening  
BCA1 / BCA2 Quantity=4  
BCA3 / BCA4 Quantity=6
-  **Part O - A/0593**  
Hinge clip plate  
BCA1 / BCA2 Quantity=4  
BCA3 / BCA4 Quantity=6
-  **Part P - A/0594**  
Hinge cover plate nickel  
BCA1 / BCA2 Quantity=4  
BCA3 / BCA4 Quantity=6

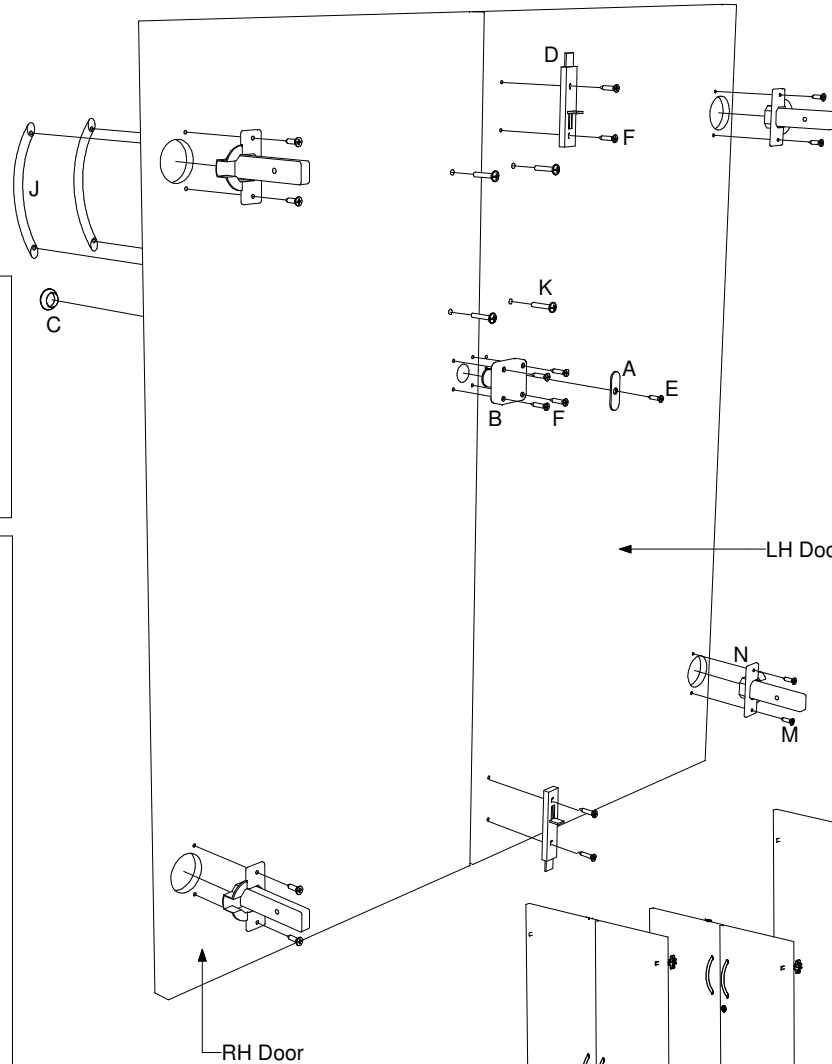


**Attach the fixed shelf  
prior to adding doors**

## Assembly steps

1. Lay the RH door down on a soft surface with the hinge holes facing down, gently bang/push part C (x1) into the lock hole.
2. Lay both doors down with the hinge holes facing up. Fix the lock (part B), cupboard lock striker plate (part A), cupboard door bolts (part D) and hinges (part N) with the screws as shown, taking care all fittings are attached in the correct orientation.
3. Finally add the handles (part J), this may be easier if the area to which the handle is fixed overhangs a raised surface.
4. The doors are now ready to be added to the adjustable bookcase.

### Note

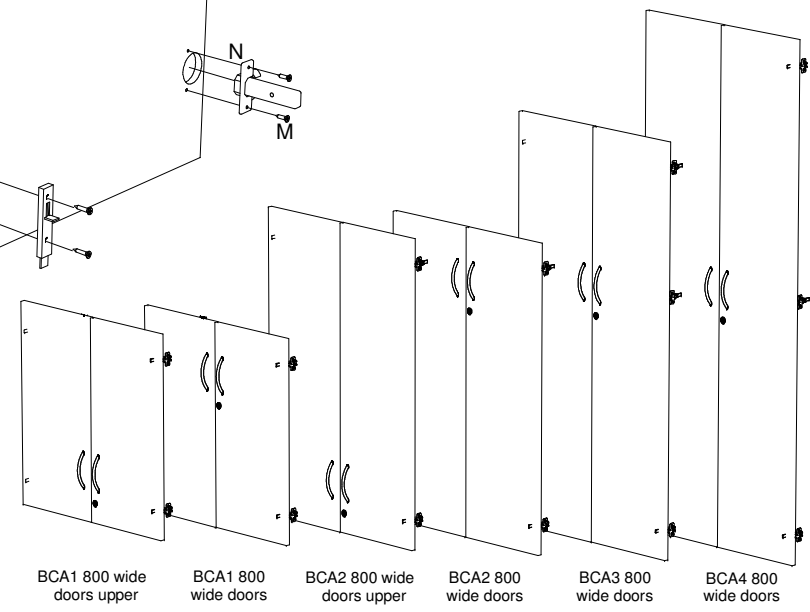

If a fixed shelf is required attach before adding doors.





## Part 2 of 2 - Fitting the doors


## Step B - Adding the angled striker plates

**Tools required**

-  Pozi head screw driver
-  Bradle

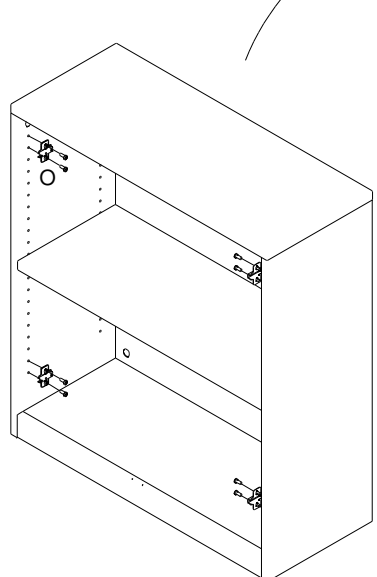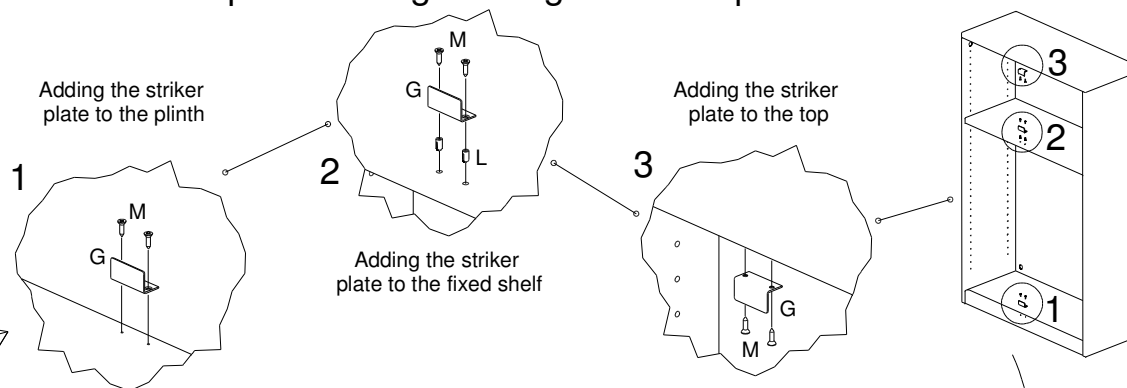

**Step A - Adding the hinge clip plates**

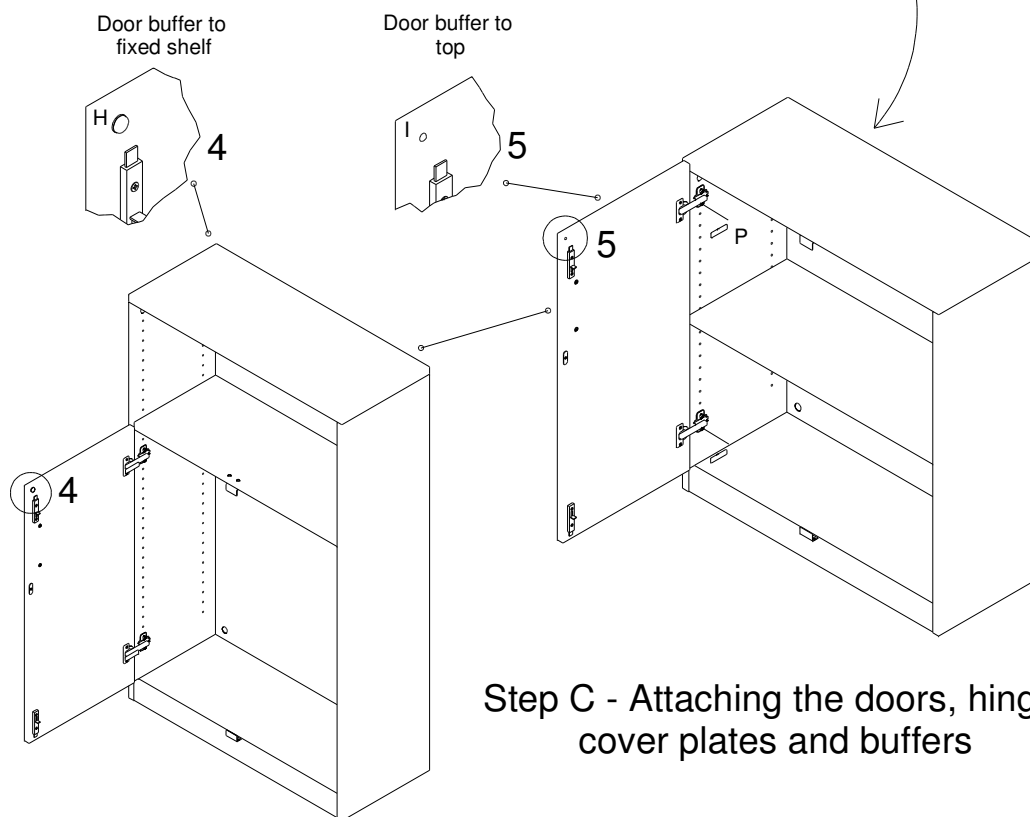

**Step C - Attaching the doors, hinge cover plates and buffers**

### Assembly steps

#### Step A

Add part O to the bookcase using the screws provided with the plates. To obtain the correct placement it may help to use the prepared door as a guide. (Ensure the screws are positioned centrally to the screw slots and the arrows on the plates are facing out).

#### Step B

Next attach the striker plates to the bookcase. Depending on the placement of the doors the plates must either be attached to the plinth, fixed shelf or top. The doors always require two striker plates to be attached, in two of the three ways described

When attaching the striker plate (part G) to the plinth the pilot holes in the plinth should be enlarged using a bradle, then use the screws (part M) to fix. (See diagram 1).

When attaching the striker plate (part G) to the fixed shelf, push/bang the nylon inserts (parts L) into the holes (open end of inserts facing out) then use the screws (part M) to fix. (See diagram 2).

When attaching the striker plate (part G) to the top simply fasten using the screws (part M). (See diagram 3).

#### Step C

Firstly attach the doors by clipping the hinges onto the hinge clip plates (parts O). When attaching larger doors it may be necessary to support the weight of the door when fastening the bottom hinge.

With the doors in place the next step is to add the door buffers, select the correct buffer according to where the top of the doors finish. If they finish against the fixed shelf use part H (See diagram 4). If they finish against the top use part I (See diagram 5).

It may be necessary to adjust the doors alignment by tweaking the screws on the hinges. Before doing this it is recommended to attach all doors.

Finally add the hinge cover plates (part P) to finish the hinges.